

SRX for easy attaching and detaching device




BENEFIT

- Easy installation
- Can be used in places where replacement is frequently required
- Simple design that is easy to use anywhere


APPLICATION

- Replacing signboard parts
- Removable store display

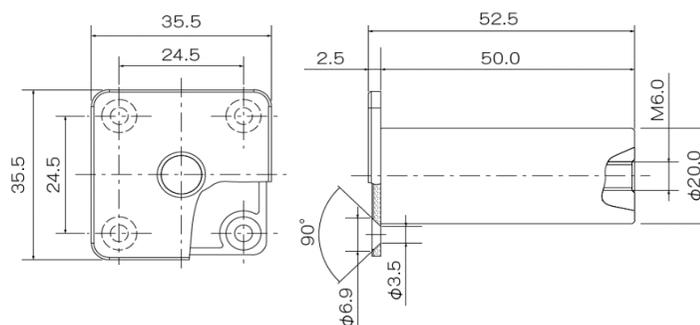

Code	Part No.	Allowable load [N]			Durability [Cycle]	Operation Temperature [°C] (°F)
		「A」 Direction	「B」 Direction	「C」 Direction		
381001	SRX-01	100	50	50	50,000	-10 to 50 (14 to 122°F)

ALLOWABLE LOAD

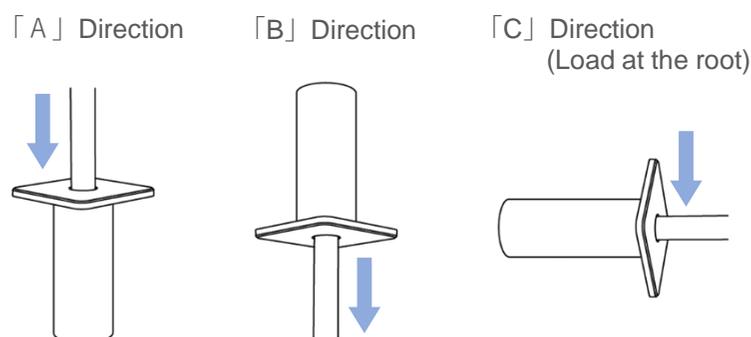


DURABILITY TEST CONDITION

Cycle	1 attach and detach / cycle
Load	Allowable load

MAIN MATERIAL


Part name	Material
Housing	Zinc Die Casting
Cap	Plastics
Cover	Plastics

CONSTITUTION

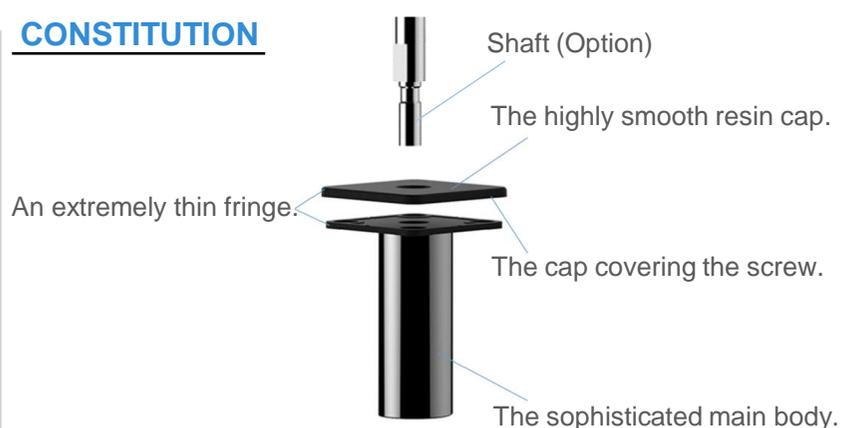


SHAFT SIZE

Dimensions of detaching shaft component

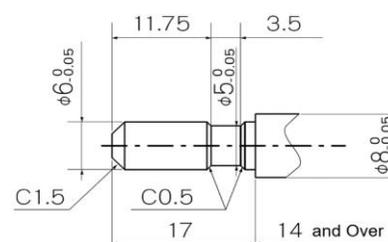

* You can purchase the shaft as an option.

How to use

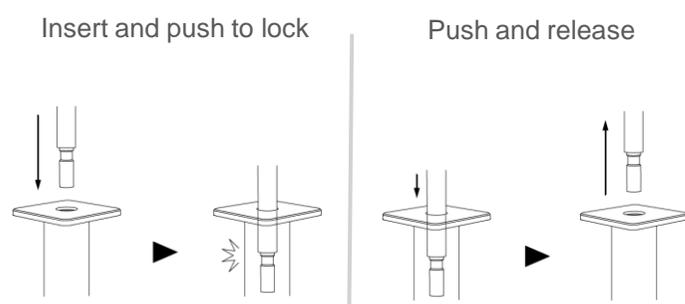

MOUNTING



TOK, Inc.

HEAD OFFICE, TOKYO, JAPAN
 TEL : 81-3-3969-1584
 EMAIL : support@tok-inc.com
 URL : www.tok-inc.com/en

CAD Data Download

Product
<https://bit.ly/2UO54d5>



Option

<https://bit.ly/2V0yPZP>

